

# PRECISE CLOCK SOLUTIONS USING CARRIER PHASE FROM GPS RECEIVERS IN THE INTERNATIONAL GPS SERVICE

J. F. Zumberge, D. C. Jefferson, D. A. Stowers,  
R. L. Tjoelker, and L. E. Young  
Jet Propulsion Laboratory, California Institute of Technology  
4800 Oak Grove Drive, Pasadena, CA 91109-8099, USA  
tel +1 818 3546734 fax +1 818 3934965  
e-mail James.F.Zumberge@jpl.nasa.gov

## Abstract

*As one of its activities as an Analysis Center in the International GPS Service (IGS), the Jet Propulsion Laboratory (JPL) uses data from a globally distributed network of geodetic-quality GPS receivers to estimate precise clock solutions, relative to a chosen reference, for both the GPS satellites and GPS receiver internal clocks, every day. The GPS constellation and ground network provide geometrical strength resulting in formal errors of about 100 psec for these estimates.*

*Some of the receivers in the global IGS network contain high quality frequency references, such as hydrogen masers. The clock solutions for such receivers are smooth at the 20-psec level on time scales of a few minutes. There are occasional (daily to weekly) shifts at the microsec level, symptomatic of receiver resets, and 200-psec-level discontinuities at midnight due to 1-day processing boundaries.*

*Relative clock solutions among 22 IGS sites proposed as "fiducials" in the IGS/BIPM pilot project have been examined over a recent 4-week period. This allows a quantitative measure of receiver reset frequency as a function of site. For days and sites without resets, the Allan deviation of the relative clock solutions is also computed for subdaily values of  $\tau$ .*

## TWO-STATION EXAMPLE

Figure 1 shows the network of geodetic-quality receivers in the International GPS Service. A number of these use hydrogen maser frequency references, some of which have been proposed as timing fiducials in the IGS/BIPM pilot project (<http://maia.usno.navy.mil/gpst.html>) to use the phase of the GPS carrier in time transfer (e.g.<sup>[1]</sup>). These sites are indicated by large circles in Figure 1.

The GPS phase and pseudorange observables are modeled as

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>DEC 1998</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-1998 to 00-00-1998</b>	
4. TITLE AND SUBTITLE <b>Precise Clock Solutions Using Carrier Phase from GPS Receivers in the International GPS Service</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>California Institute of Technology, Jet Propulsion Laboratory, 4800 Oak Grove Drive, Pasadena, CA, 91109-8099</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES <b>See also ADA415578. 30th Annual Precise Time and Time Interval (PTTI) Systems and Applications Meeting, Reston, VA, 1-3 Dec 1998</b>					
14. ABSTRACT <b>see report</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT <b>Same as Report (SAR)</b>	18. NUMBER OF PAGES <b>7</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

$$L_r^x = \rho_r^x + b_r^x + z_r^x + \omega_r^x + C_r - c^x + \nu_r^x \quad (1)$$

and

$$P_r^x = \rho_r^x + z_r^x + C_r - c^x + \eta_r^x, \quad (2)$$

where  $L_r^x$  ( $P_r^x$ ) is the measured phase (pseudorange) between transmitter  $x$  and receiver  $r$ ,  $\rho_r^x$  is the range,  $b_r^x$  is phase bias,  $z_r^x$  is the troposphere delay,  $\omega_r^x$  is the phase windup,  $C_r$  is receiver clock,  $c^x$  is transmitter clock, and  $\nu_r^x$  ( $\eta_r^x$ ) is the phase (pseudorange) noise. One receiver clock is chosen as a reference; all clock solutions are relative to the reference. No *a priori* correlations are assumed among clock solutions.

At JPL's IGS Analysis Center, each day a subset of 37 stations in Figure 1 is selected with good geographic distribution. Data from this subset are used to estimate precise transmitter parameters<sup>[2]</sup>. Receiver parameters from sites not in the subset can be determined with precise point positioning<sup>[3]</sup>. The formal error of each estimated clock is about 100 psec (3 cm).

Figure 2 shows the Madrid, Spain (mad2) clock estimate minus the Tidbinbilla, Australia (tid2) clock estimate during April, 1998. The difference is piecewise linear with occasional  $\mu$ sec-level shifts. The shifts represent a change at one of the sites, usually a receiver-induced reset.

For this clock "baseline" the period April 17-30, 1998 is free of resets. The mad2 - tid2 difference has been de-trended for this period (the slope - about 7 nsec/day  $\approx 8 \times 10^{-14}$  - is the result of a frequency offset between the two sites) and shown in Figure 3. Except for the 0.2-nsec-level shifts - due to 1-day processing boundaries - the solution is smooth at the 20-psec level.

## IGS/BIPM CLOCK SITES, OCTOBER 1998

Information on stations in the IGS can be found at <http://igscb.jpl.nasa.gov>. The sites with 4-character IDs

```
algo brus drao fair fort gode gol2 hob2 irkt kokb mad2 mate nlib nyal nrc1 onsa piel
tid2 usno wes2 wtzr yell
```

have been proposed as timing fiducials in the IGS/BIPM pilot project. For each day during the 4-week period beginning October 4, 1998, we have computed the relative clock estimates among all clock baselines, and then computed the Allan deviation  $\sigma(\tau)$

$$\sigma(\tau) = \sqrt{\frac{\sum_{i=1}^{N-2m} (x_{i+2m} - 2x_{i+m} + x_i)^2}{2(N-2m)\tau^2}}, \quad (3)$$

where  $m = \tau/\tau_o = 1, 2, 4, 8, \dots, 64$  and  $\tau_o = 300$  sec is the spacing of data used in parameter estimation. In (3),  $x_i$  indicates the  $i^{th}$  difference in clock estimates between the two sites that form the baseline.

In the event that a given receiver has a sufficiently large discontinuity in its clock during the day, the Allan deviation of that receiver with respect to any other will be

anomalously large. This suggests that, to determine whether a given receiver had a shift during the day, one should look at its Allan deviation with respect to all other receivers, and choose the smallest. If this is sufficiently small, it did not have a shift during that day.

Figure 4 gives an example for October 27, 1998. For each site indicated on the abscissa, the values of  $\sigma(\tau)$  for that site with respect to other sites are plotted as ordinates. It is clear that four sites – fort, gode, hob2 and nlib – have variations on that day that are large with respect to the other sites. In Figure 4 we have taken  $\tau = 600$  s, although the character of such a plot is the same for other values of  $\tau$ .

For each receiver, day, and  $\tau$ , we have computed the smallest  $\sigma(\tau)$ . The median values over the 4-week period are given in Table 1. (Median is used because it is insensitive to outliers.) On a given day, if a receiver can be paired with no other to achieve  $\sigma(\tau) < 10^{-12.9}$  for  $\tau = 600$  s, then that receiver is assumed to have a shift during that day. The number of such days are given as the last column in the table. Because it was disconnected from its H maser during most of October (IGS Mail 2034, October 2, 1998, <ftp://igscb.jpl.nasa.gov/igscb/mail/igsmail/igsmess.2034>) the results for hob2 (Hobart, Tasmania) are indicative of the receiver's internal oscillator.

As an example, the results using this methodology for the clock at Algonquin Park, Canada (algo) are plotted in Figure 5.

## CONCLUSIONS

Of 22 sites proposed for use in the IGS/BIPM pilot project, four exhibited no resets during the 4-week period beginning October 4, 1998. For 17 others (excluding 1 which was using its internal oscillator), there were typically 1 to 9 days where the receiver exhibited a reset. Allan deviations are typically  $\log_{10} \sigma(\tau) \approx -13.2 \pm 0.1$  at  $\tau = 300$  s to  $\log_{10} \sigma(\tau) \approx -14.2 \pm 0.3$  at  $\tau = 19200$  s.

*Acknowledgment* The research described here was carried out by the Jet Propulsion Laboratory, California Institute of Technology, under a contract with the National Aeronautics and Space Administration.

## REFERENCES

- [1] Kristine Larson and Judah Levine 1995, "Time Transfer Using the Phase of the GPS Carrier," *IEEE Transactions on Ultrasonics, Ferroelectrics, and Frequency Control*, 45, 3, 539-540.
- [2] J. F. Zumberge, M. M. Watkins, and F. H. Webb 1998, "Characteristics and Applications of Precise GPS Clock Solutions Every 30 Seconds," *Navigation*, 44, 4, 449-456.
- [3] J. F. Zumberge, M. B. Hefflin, D. C. Jefferson, M. M. Watkins, and F. H. Webb 1997, "Precise point positioning for the efficient and robust analysis of GPS data from large networks," *J. Geophys. Res.*, 102, B3, 5005-5017.

<i>site</i>	$\tau$	300 s	600 s	1200 s	2400 s	4800 s	9600 s	19200 s	<i>shift days</i>
algo	-13.32	-13.56	-13.78	-13.95	-14.14	-14.28	-14.40	-14.40	0
brus	-13.21	-13.27	-13.31	-13.43	-13.54	-13.53	-13.75	-13.75	2
drao	-13.32	-13.54	-13.73	-13.91	-14.06	-14.18	-14.32	-14.32	1
fair	-13.25	-13.50	-13.73	-13.89	-14.10	-14.23	-14.51	-14.51	6
fort	-13.02	-13.19	-13.44	-13.64	-13.71	-13.68	-13.60	-13.60	9
gode	-13.32	-13.49	-13.72	-13.90	-13.98	-14.05	-13.99	-13.99	6
gol2	-13.25	-13.49	-13.73	-13.94	-14.13	-14.26	-14.41	-14.41	7
hob2	-9.20	-9.42	-9.70	-9.99	-10.30	-10.60	-10.89	-10.89	23
irkt	-12.69	-12.96	-13.21	-13.47	-13.66	-13.85	-13.98	-13.98	10
kokb	-13.20	-13.36	-13.54	-13.75	-13.93	-14.10	-14.25	-14.25	4
mad2	-13.26	-13.44	-13.61	-13.82	-13.99	-14.15	-14.28	-14.28	6
mate	-13.25	-13.35	-13.50	-13.68	-13.84	-13.87	-13.85	-13.85	9
nlib	-13.27	-13.49	-13.66	-13.77	-13.99	-14.11	-14.20	-14.20	4
nyal	-13.14	-13.36	-13.58	-13.77	-13.93	-14.04	-13.64	-13.64	8
nrc1	-13.28	-13.48	-13.67	-13.80	-14.00	-14.14	-14.31	-14.31	3
onsa	-13.28	-13.47	-13.65	-13.83	-13.98	-14.11	-14.24	-14.24	3
pie1	-13.31	-13.53	-13.74	-13.93	-14.11	-14.32	-14.52	-14.52	0
tid2	-13.13	-13.35	-13.57	-13.78	-13.92	-14.01	-14.11	-14.11	0
usno	-13.25	-13.50	-13.75	-13.93	-14.13	-14.33	-14.54	-14.54	0
wes2	-13.31	-13.51	-13.74	-13.90	-14.04	-14.07	-14.14	-14.14	1
wtzr	-13.14	-13.32	-13.51	-13.70	-13.93	-14.10	-14.21	-14.21	1
yell	-13.15	-13.39	-13.60	-13.75	-13.92	-13.98	-14.22	-14.22	6

Table 1: Allan deviation  $\log_{10} \sigma(\tau)$  as a function of site for subdaily values of  $\tau$ . The *shift days* column counts how many days during the 4-week period beginning October 4, 1998 the receiver clock exhibited a step function. Note that the H maser at hob2 was not connected to the receiver for nearly all of October, so that results for it characterize the receiver's internal oscillator.

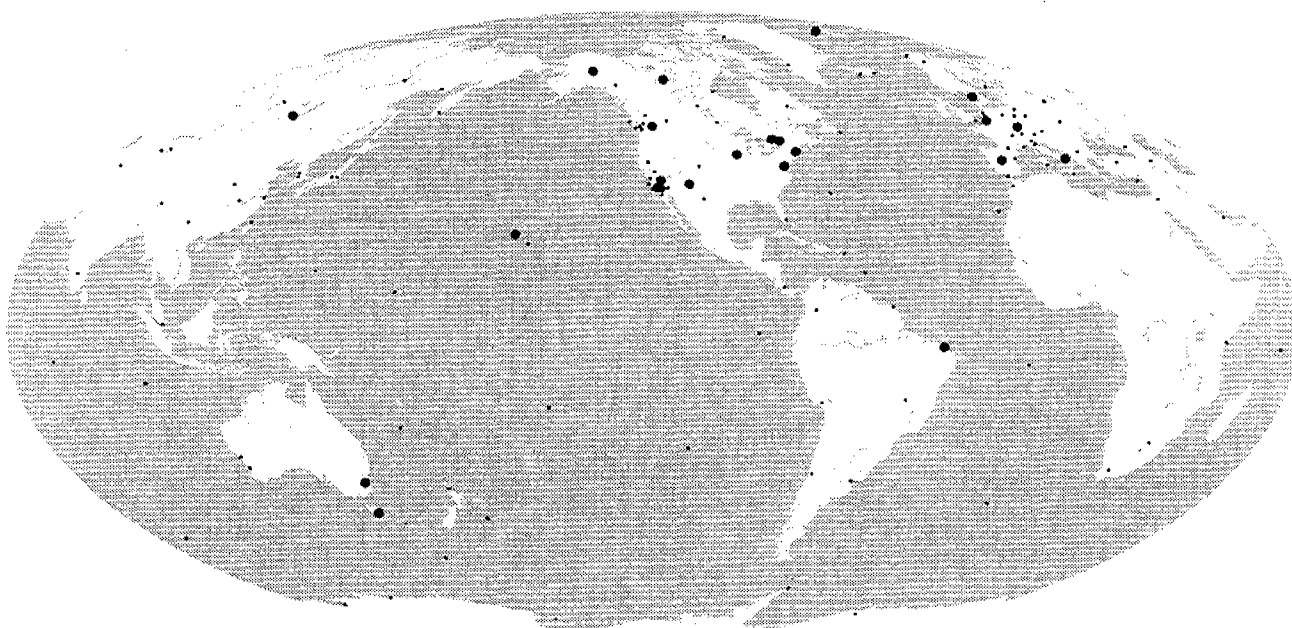


Figure 1: The IGS network as of Oct 15, 1998. The large circles indicate sites proposed as timing fiducials in the IGS/BIPM pilot project.

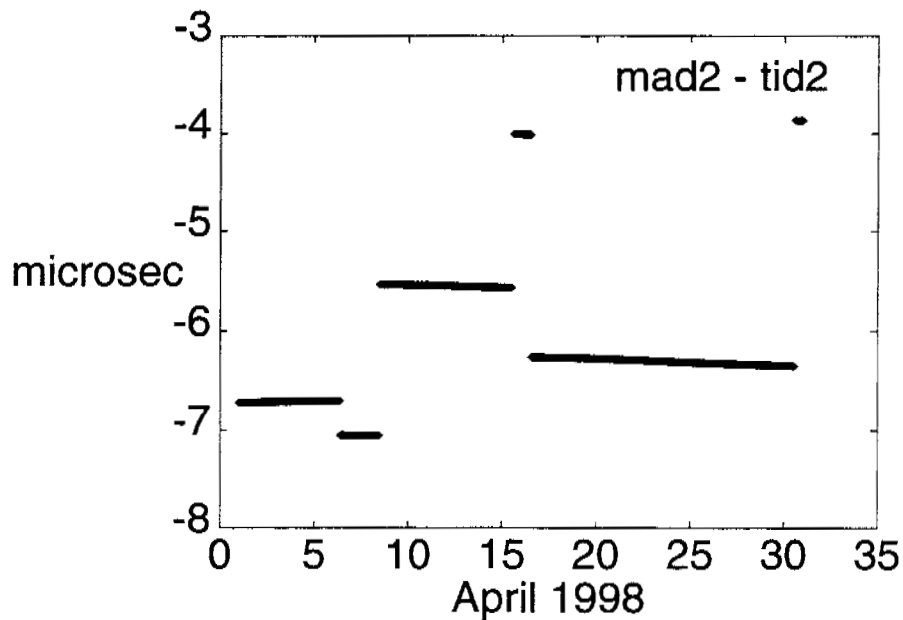


Figure 2: The Madrid, Spain clock solution minus the Tidbinbilla, Australia clock solution, during April, 1998. The difference is piecewise linear with occasional  $\mu\text{sec}$ -level shifts. The shifts are presumably symptoms of changes at one or both of the sites.

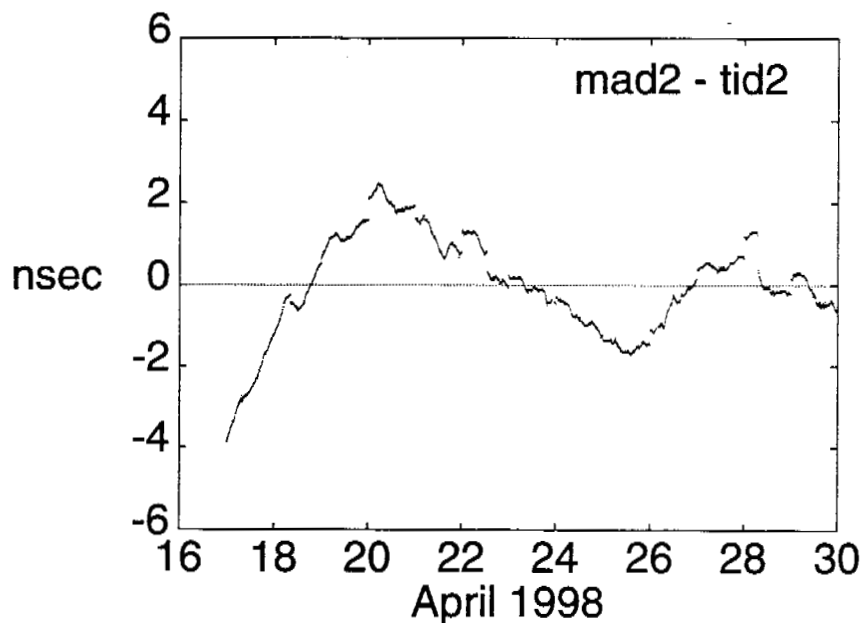


Figure 3: The Madrid, Spain clock solution minus the Tidbinbilla, Australia clock solution, for April 17-30, 1998. The difference has been de-trended (the slope is about  $7 \text{ nsec/day} \approx 8 \times 10^{-14}$ ). Except for the 0.2-nsec-level shifts – due to 1-day processing boundaries – the solution is smooth at the 20-psec level.

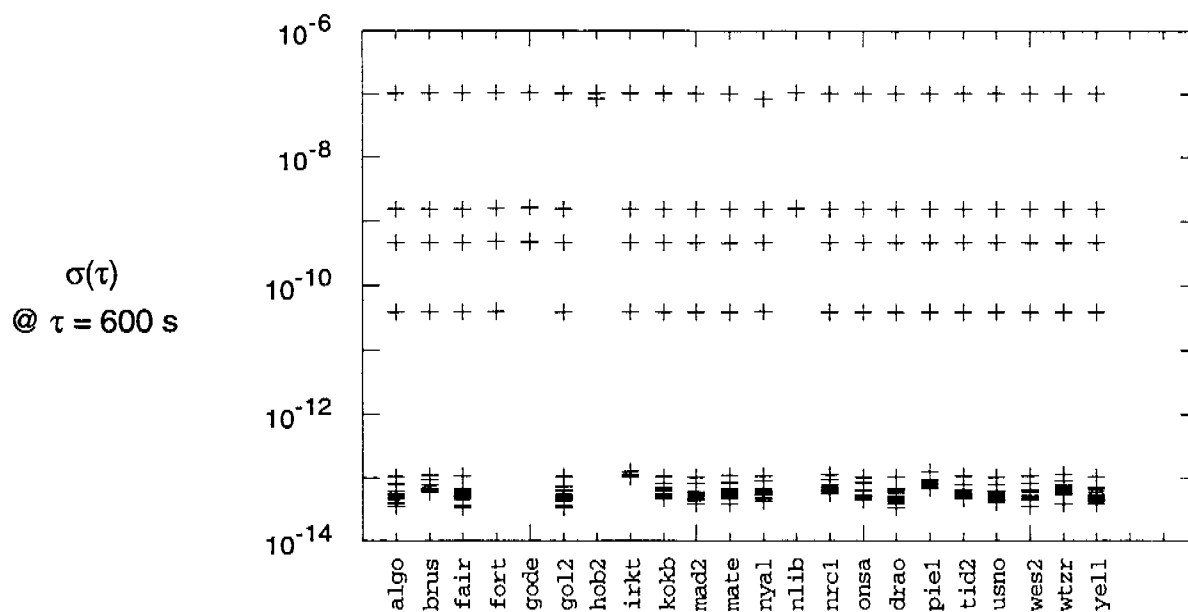


Figure 4: The Allan deviation at  $\tau = 600$  s on October 27, 1998, for all baselines among the 22 proposed timing fiducials. The figure indicates that none of the four sites **fort**, **gode**, **hob2**, **nlib** could be paired with any site to achieve  $\log_{10} \sigma(\tau) < -12.9$ .

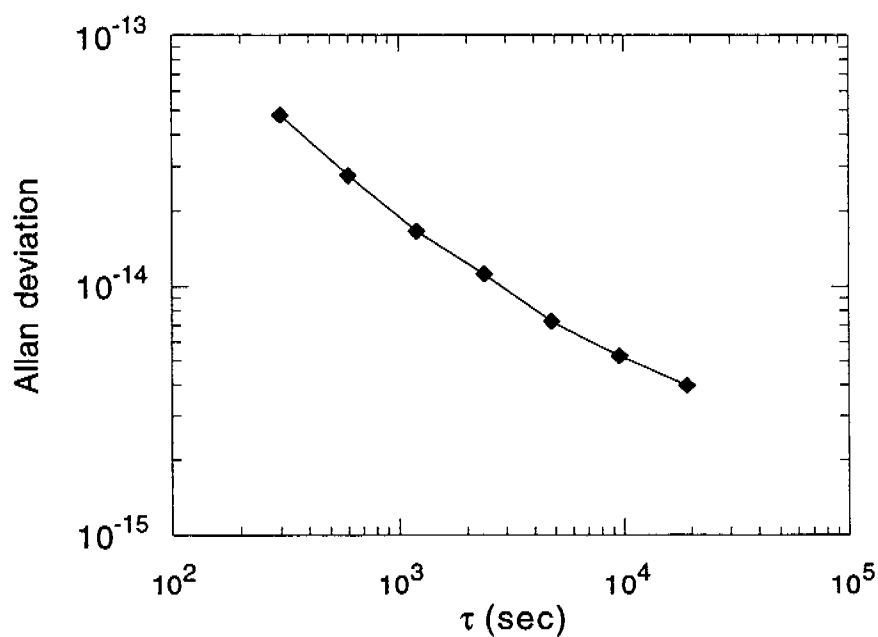


Figure 5: The Allan deviation for Algonquin Park, Canada; see text for methodology. The logarithmic slope is  $-0.60$ .

## Questions and Answers

JIM RAY (USNO): Jim, will you make this information available once you get it operational?

JIM ZUMBERGE (JPL): Yes, I think we would make it public. We are not quite ready yet.